


Scissor Lift Tong Remotely Operated Tong Range

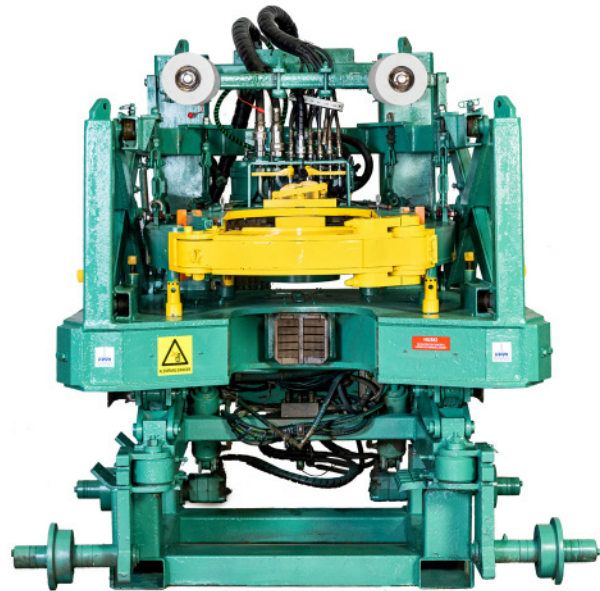

The Scissor Lift tong range evolved over decades of experience providing remotely operated TRS solutions.

The Scissor Lift tong range is available in several sizes to cater for tubulars from 2 3/8" to 22", with up to 120,000 ft-lbs capability. The Scissor Lift tong is safely operated from outside the red zone using a wireless remote control panel independent of other rig floor equipment. The unique scissor lift system allows the tong to work at heights of up to 2.5 meters with ease. Track mounted on existing iron roughneck tracks or independent portable tracks, the tong system can be installed on most rig floors. The Scissor Lift tong is a proven remote-operated solution engineered to withstand the harshest drilling environments and certified to the highest global standards.

BENEFITS

- Removal of personnel from the red zone
- Ultra high torque capacity
- Independent of other rig floor equipment
- Suitable for integrated services, reducing POB
- Low maintenance and robust build

Website: www.odfjelltechnology.com

Enquiries: otl-wellservices@odfjelltechnology.com

FEATURES

- Tubular range from 2 3/8" – 22"
- Max Torque of up to 120,000 lbs/ft (162,698 Nm)
- Wireless remote control
- Track mounted on iron roughneck tracks or independent tracks (can be tailored to fit any rig floor)
- Up to 2.5 meters working height
- Pipe centralisation, stab in rollers
- Closed loop hydraulic system powered by the rig hydraulics or independent hydraulic power unit
- Available with CE marking
- Optional stab-in guide attachment
- Optional casing cutting attachment
- Optional torque turn computer monitoring